AXILAT™ UP 460S

Sell Sheet





High performance Redispersible Powder for flexible Ceramic Tile Adhesive

Builders and contractors worldwide need to guarantee that the tiles they install in new construction or renovation projects will endure over time by withstanding the impact of building movements, both to minimise the cost of future repairs and to meet client expectations for quality workmanship.

To meet this demand, we are introducing **AXILAT™ UP 460S**, a Redispersible Powder based on a core-shell acrylic terpolymer that's specifically designed for premium applications. It gives CTA the flexibility to accommodate substrate's expansion and contraction without shifting. Meanwhile, its market leading alkali resistance ensures robust saponification and water resistance, making it ideal for use in bathrooms where condensation occurs. As with the rest of the AXILAT™ RDP range, adhesion performances remain at the highest level.

Last but not least, **AXILAT™ UP 460S** is free of organic solvents, plasticizers and film-forming agents, allowing the development of CTA formulations that meet EC1+ requirements.



Applications

- Ceramic Tile Adhesives:
 - C2 TE S1
 - C2 E S2

Features

Property

- High resistance to alkalinity
- Excellent dry, wet and heat adhesion
- Extended open time
- Free of organic solvents, plasticizers and film-forming agents
- Allows EC1+ certified formulation

Core-Shell	
Chemistry	VA / VV / Acrylic
Tg	-33 °C / +29 °C
Ash Content	10 %
Particle Size	110 μm

AXILAT™ UP 460S

AXILAT™ UP 460S


Sell Sheet



Performance comparison




Alkali Resistance

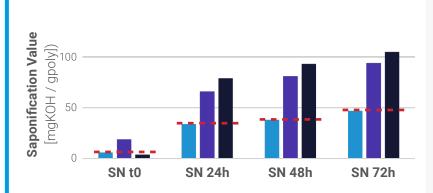

AXILAT™ UP 460S

provides significantly greater alkali resistance than current available RDPs, which provide basis for lower emissions and enhanced water resistance.


Adhesion (C2 TE S1)

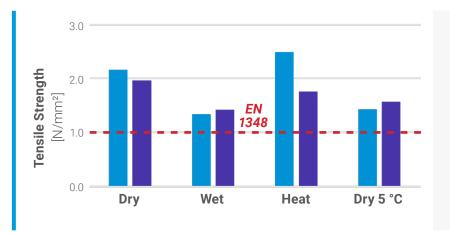

AXILAT™ UP 460S

shows excellent adhesion performances in C2 TE S1 mortars, including at low temperature.

Transverse Deformation (C2 E S2)

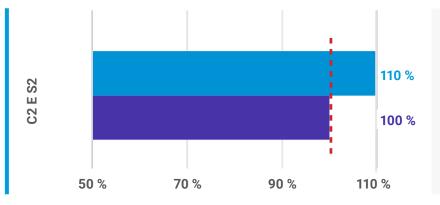

AXILAT™ UP 460S

transverse deformation in C2 E S2 formulation outperforms the market leading RDP for flexible Ceramic Tile Adhesives.

www.synthomer.com



Group Head Office

Synthomer plc 45 Pall Mall London SWTY 5JG United Kingdom

info@synthomer.com

Operational Centre Europe

Synthomer Deutschland GmbH Werrastr. 10 45768 Marl Germany

Phone: +49 23 65 49-2552

Operational Centre Americas

Synthomer USA LLC 25435 Harvard Road Beachwood, OH 44122 USA

Phone: +216-682-7000

Operational Centre Asia

Synthomer Sdn Bhd Unit 16-2, Level 16, UOA Damansara II, No. 6 Changkat Semantan, Damansara Heights 50490 Kuala Lumpur Malaysia

All orders are subject to our Standard Terms and Conditions of Sale which can be found at www.synthomer.com/to or on our Website www.synthomer.com by selecting "Terms and Conditions" and then "Sale" from the "Company" drop down menu. This information, data, and any advice or secommendation given or made by us (collectively "Information") should not be construed as professional advice or services. We do not warrant the Information or accept any responsibility for its accuracy, timeliness or completeness or for the suitability of the Information for any particular purpose. We do not accept responsibility for any matters arising out of or in connection with your reliance on the Information, including, without limitation, whether such Information infringes the intellectual property rights of any third party. For the avoidance of doubt, any Information concerning any possible use or application of Synthomer products is given by us in good faith and it is entirely for you to satisfy yourself fully as to the suitability of Synthomer products for any particular purpose.